



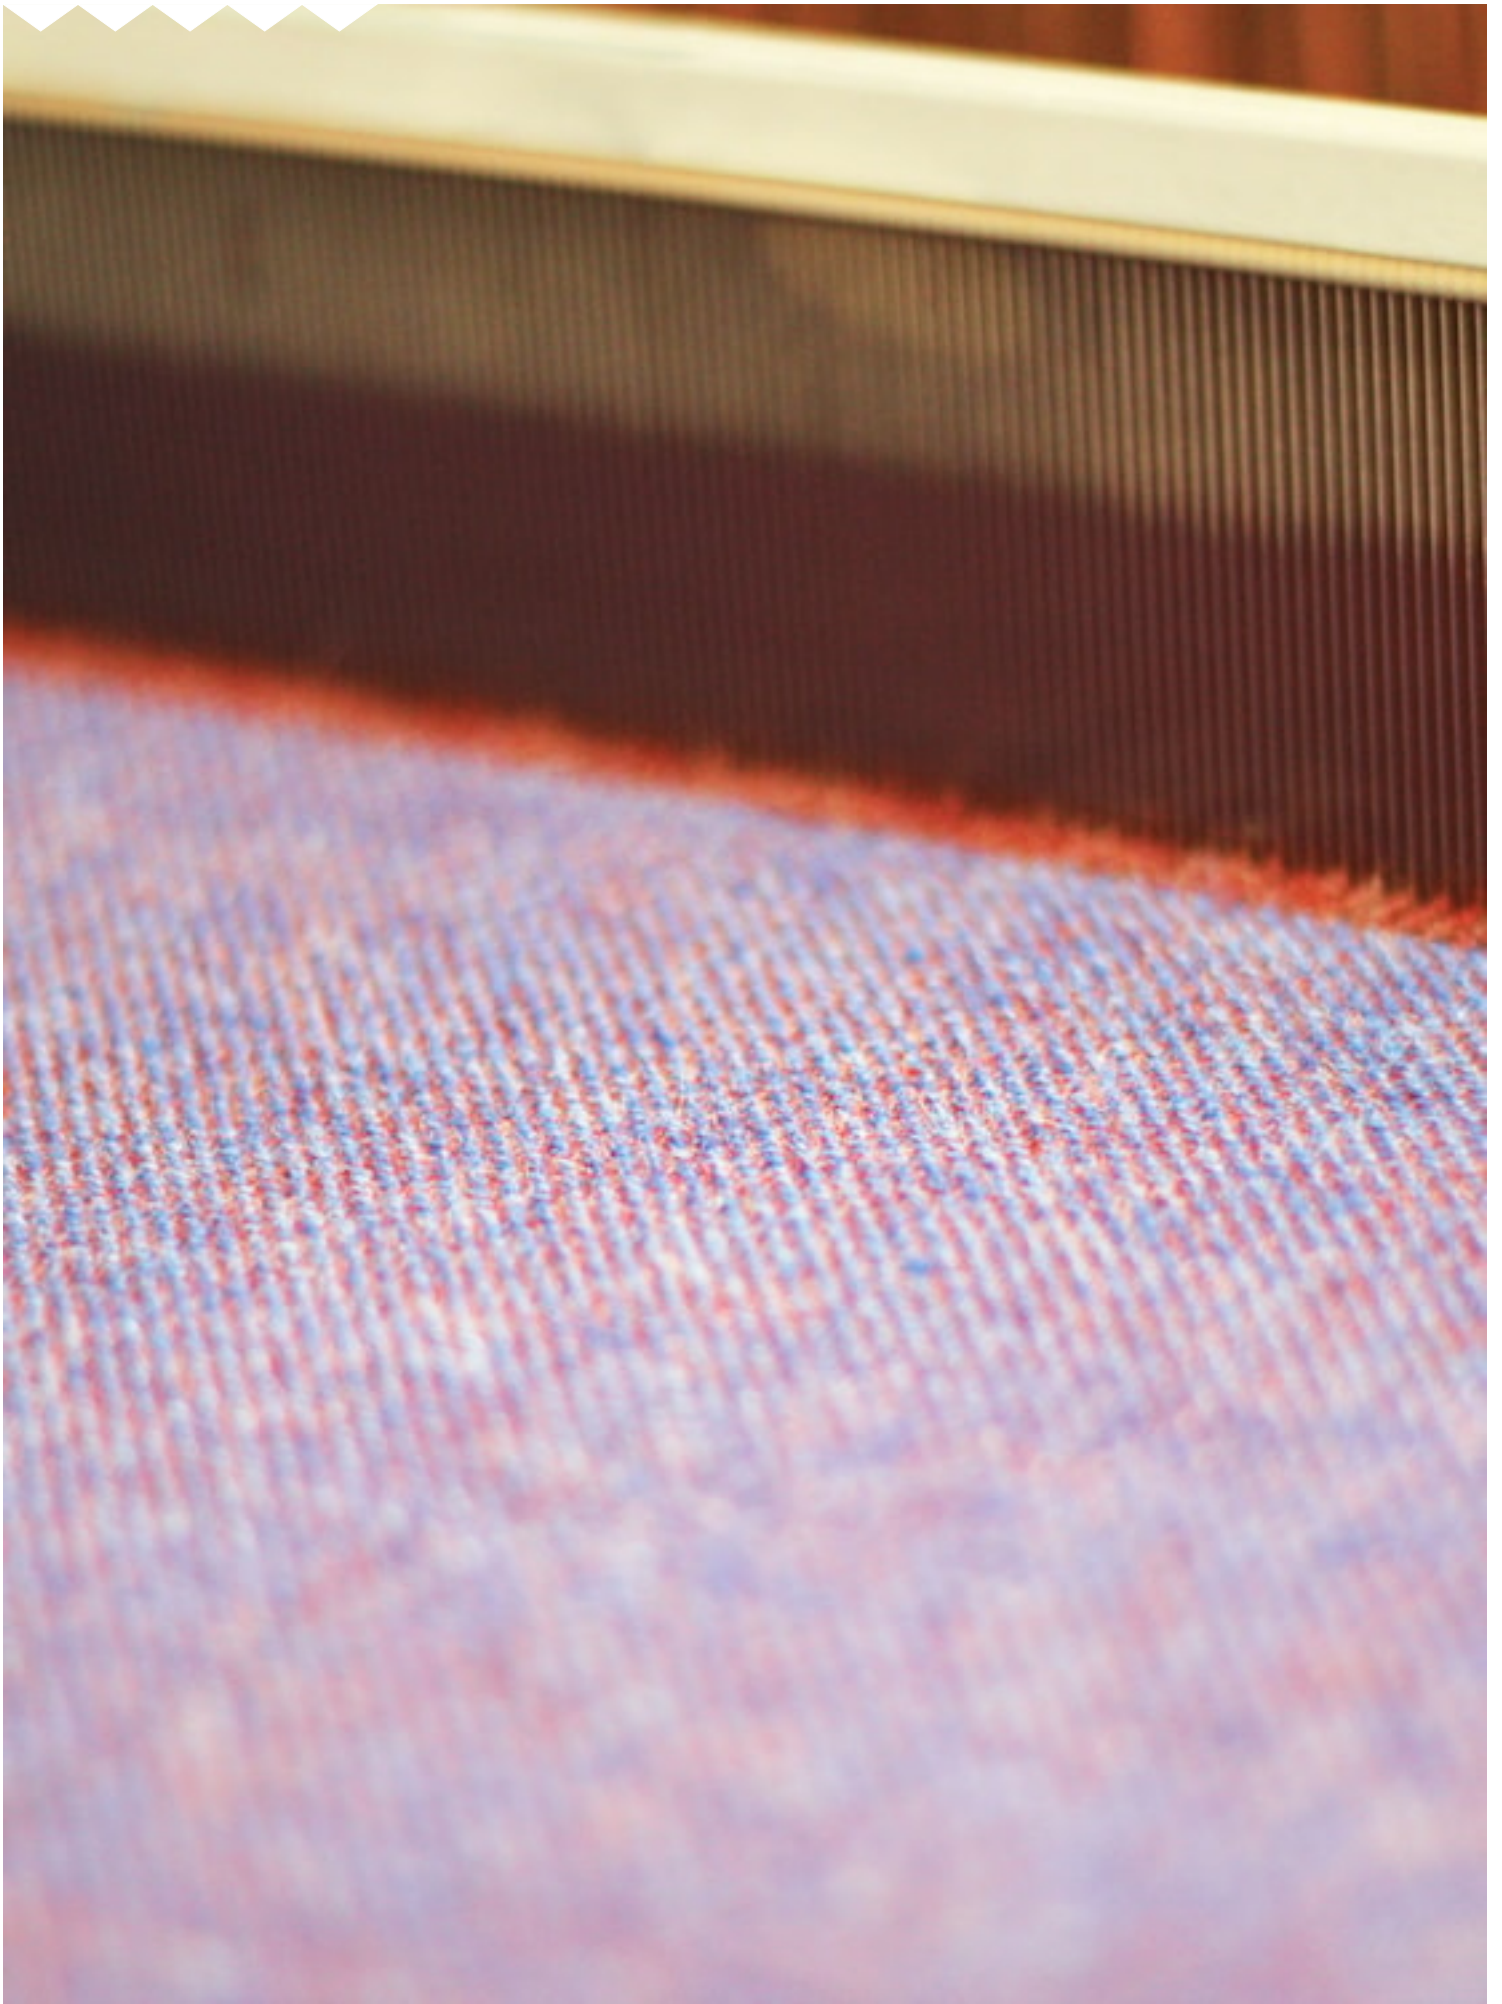


STEP

Upholstery fabrics



150




186




222




240



260




290




550




559



570




609



650




670




690




708




711




750




760



789



811



850

STEP

Upholstery fabrics


Breite: 140 cm**Gewicht:** 410 G/M²**Material:** Wolle 75%
Viskose 25%**Color fastness:***Against dry rubbing according to**EN ISO 105-X12:**- 4-5 (Scale 1-5)**Gegen Licht nach EN ISO 105-B02**- 5-7 (Skala 1-8)**Against wet rubbing according to**EN ISO 105-X12:**- 3-4 (Scale 1-5)***Scheuerfestigkeit:***Martindale (Nach: EN ISO 12947-2):**- 50000 Touren***Schwerentflammbarkeit:***- BS 5852, Crib 5**- TB 117**- IMO FTP Code Part 8 (IMO Res.**A.652 (16)**- UNI 9175, 1 IM***Wartungsanweisungen:****For further information:**Svensson
511 82 Kinna, Sweden

T: +46 320 20 92 00

F: +46 320 21 10 10

E: info@ludvigsvensson.com







860




870




886

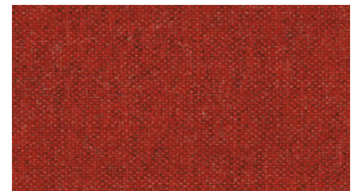

888



900



990

STEP

Upholstery fabrics

Breite: 140 cm

Gewicht: 410 G/M²

Material: Wolle 75%
Viskose 25%

Color fastness:

Against dry rubbing according to

EN ISO 105-X12:

- 4-5 (Scale 1-5)

Gegen Licht nach EN ISO 105-B02

- 5-7 (Skala 1-8)

Against wet rubbing according to

EN ISO 105-X12:

- 3-4 (Scale 1-5)

Scheuerfestigkeit:

Martindale (Nach: EN ISO 12947-2):

- 50000 Touren

Schwerentflammbarkeit:

- BS 5852, Crib 5

- TB 117

- IMO FTP Code Part 8 (IMO Res.

A.652 (16)

- UNI 9175, 1 IM

Wartungsanweisungen:



For further information:

Svensson
511 82 Kinna, Sweden

T: +46 320 20 92 00

F: +46 320 21 10 10

E: info@ludvigsvensson.com

