




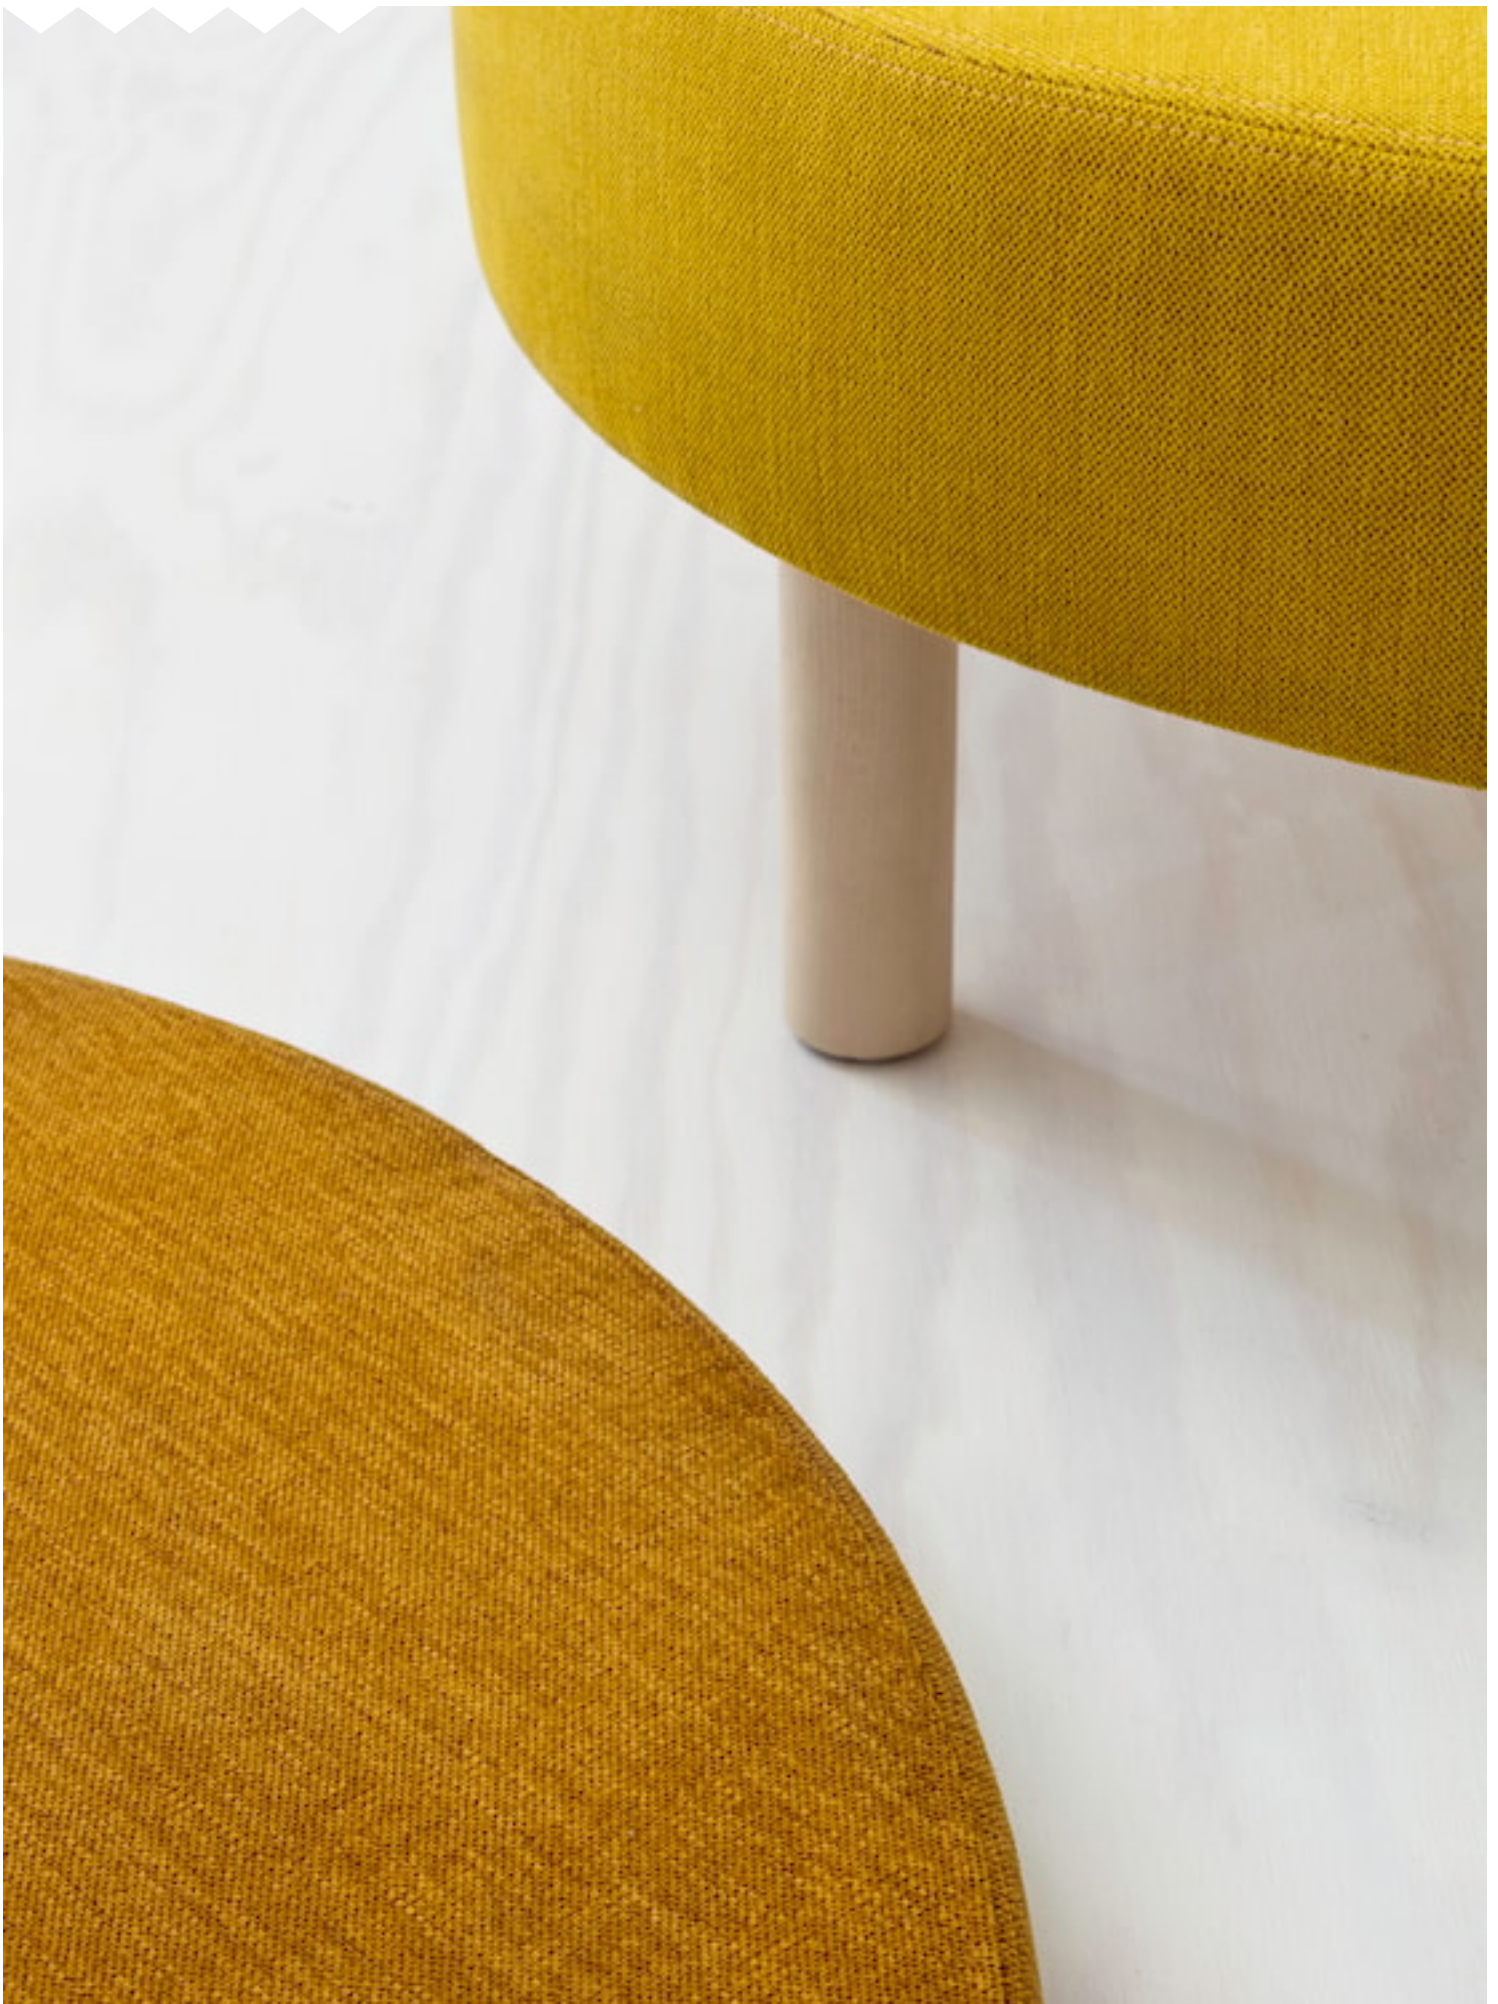


POPPY
Upholstery fabrics



3034



3236



3372



3443



3518



3554



4352



4372




4442




5245




5350



5431




5936



6236



6272



6444



6527



6562



6612



6635

POPPY

Upholstery fabrics

Breite: 150 cm

Gewicht: 355 G/M²

Material: Trevira CS 100%

Einlaufen: 2 %

Color fastness:

Against dry rubbing according to

EN ISO 105-X12:

- 4 (Scale 1-5)

Gegen Licht nach EN ISO 105-B02

- 5-7 (Skala 1-8)

Against wet rubbing according to

EN ISO 105-X12:

- 3-4 (Scale 1-5)

Scheuerfestigkeit:

Martindale (Nach: EN ISO 12947-2):

- 50000 Touren

Schwerentflammbarkeit:

- EN 1021 part 1, 2- DIN 4102-1

B1- IMO FTP Code 2010:

- DIN 4102-1 B1

- IMO FTP Code 2010: Part 8

- NF P 92 503-507, M1

- BS 5852 Crib 5

- BS 5867-2 Type B

- TB117 2013

- EN 13501-1

- NFPA 260

Wartungsanweisungen:



For further information:


Svensson
511 82 Kinna, Sweden

T: +46 320 20 92 00


F: +46 320 21 10 10

E: info@ludvigsvensson.com





6642




6731




6733



6920



6932




6953



8200



8700



8800

POPPY

Upholstery fabrics

Breite: 150 cm

Gewicht: 355 G/M²

Material: Trevira CS 100%

Einlaufen: 2 %

Color fastness:

Against dry rubbing according to

EN ISO 105-X12:

- 4 (Scale 1-5)

Gegen Licht nach EN ISO 105-B02

- 5-7 (Skala 1-8)

Against wet rubbing according to

EN ISO 105-X12:

- 3-4 (Scale 1-5)

Scheuerfestigkeit:

Martindale (Nach: EN ISO 12947-2):

- 50000 Touren

Schwerentflammbarkeit:

- EN 1021 part 1, 2- DIN 4102-1

B1- IMO FTP Code 2010:

- DIN 4102-1 B1

- IMO FTP Code 2010: Part 8

- NF P 92 503-507, M1

- BS 5852 Crib 5

- BS 5867-2 Type B

- TB117 2013

- EN 13501-1

- NFPA 260

Wartungsanweisungen:



For further information:

Svensson
511 82 Kinna, Sweden

T: +46 320 20 92 00

F: +46 320 21 10 10

E: info@ludvigsvensson.com

