



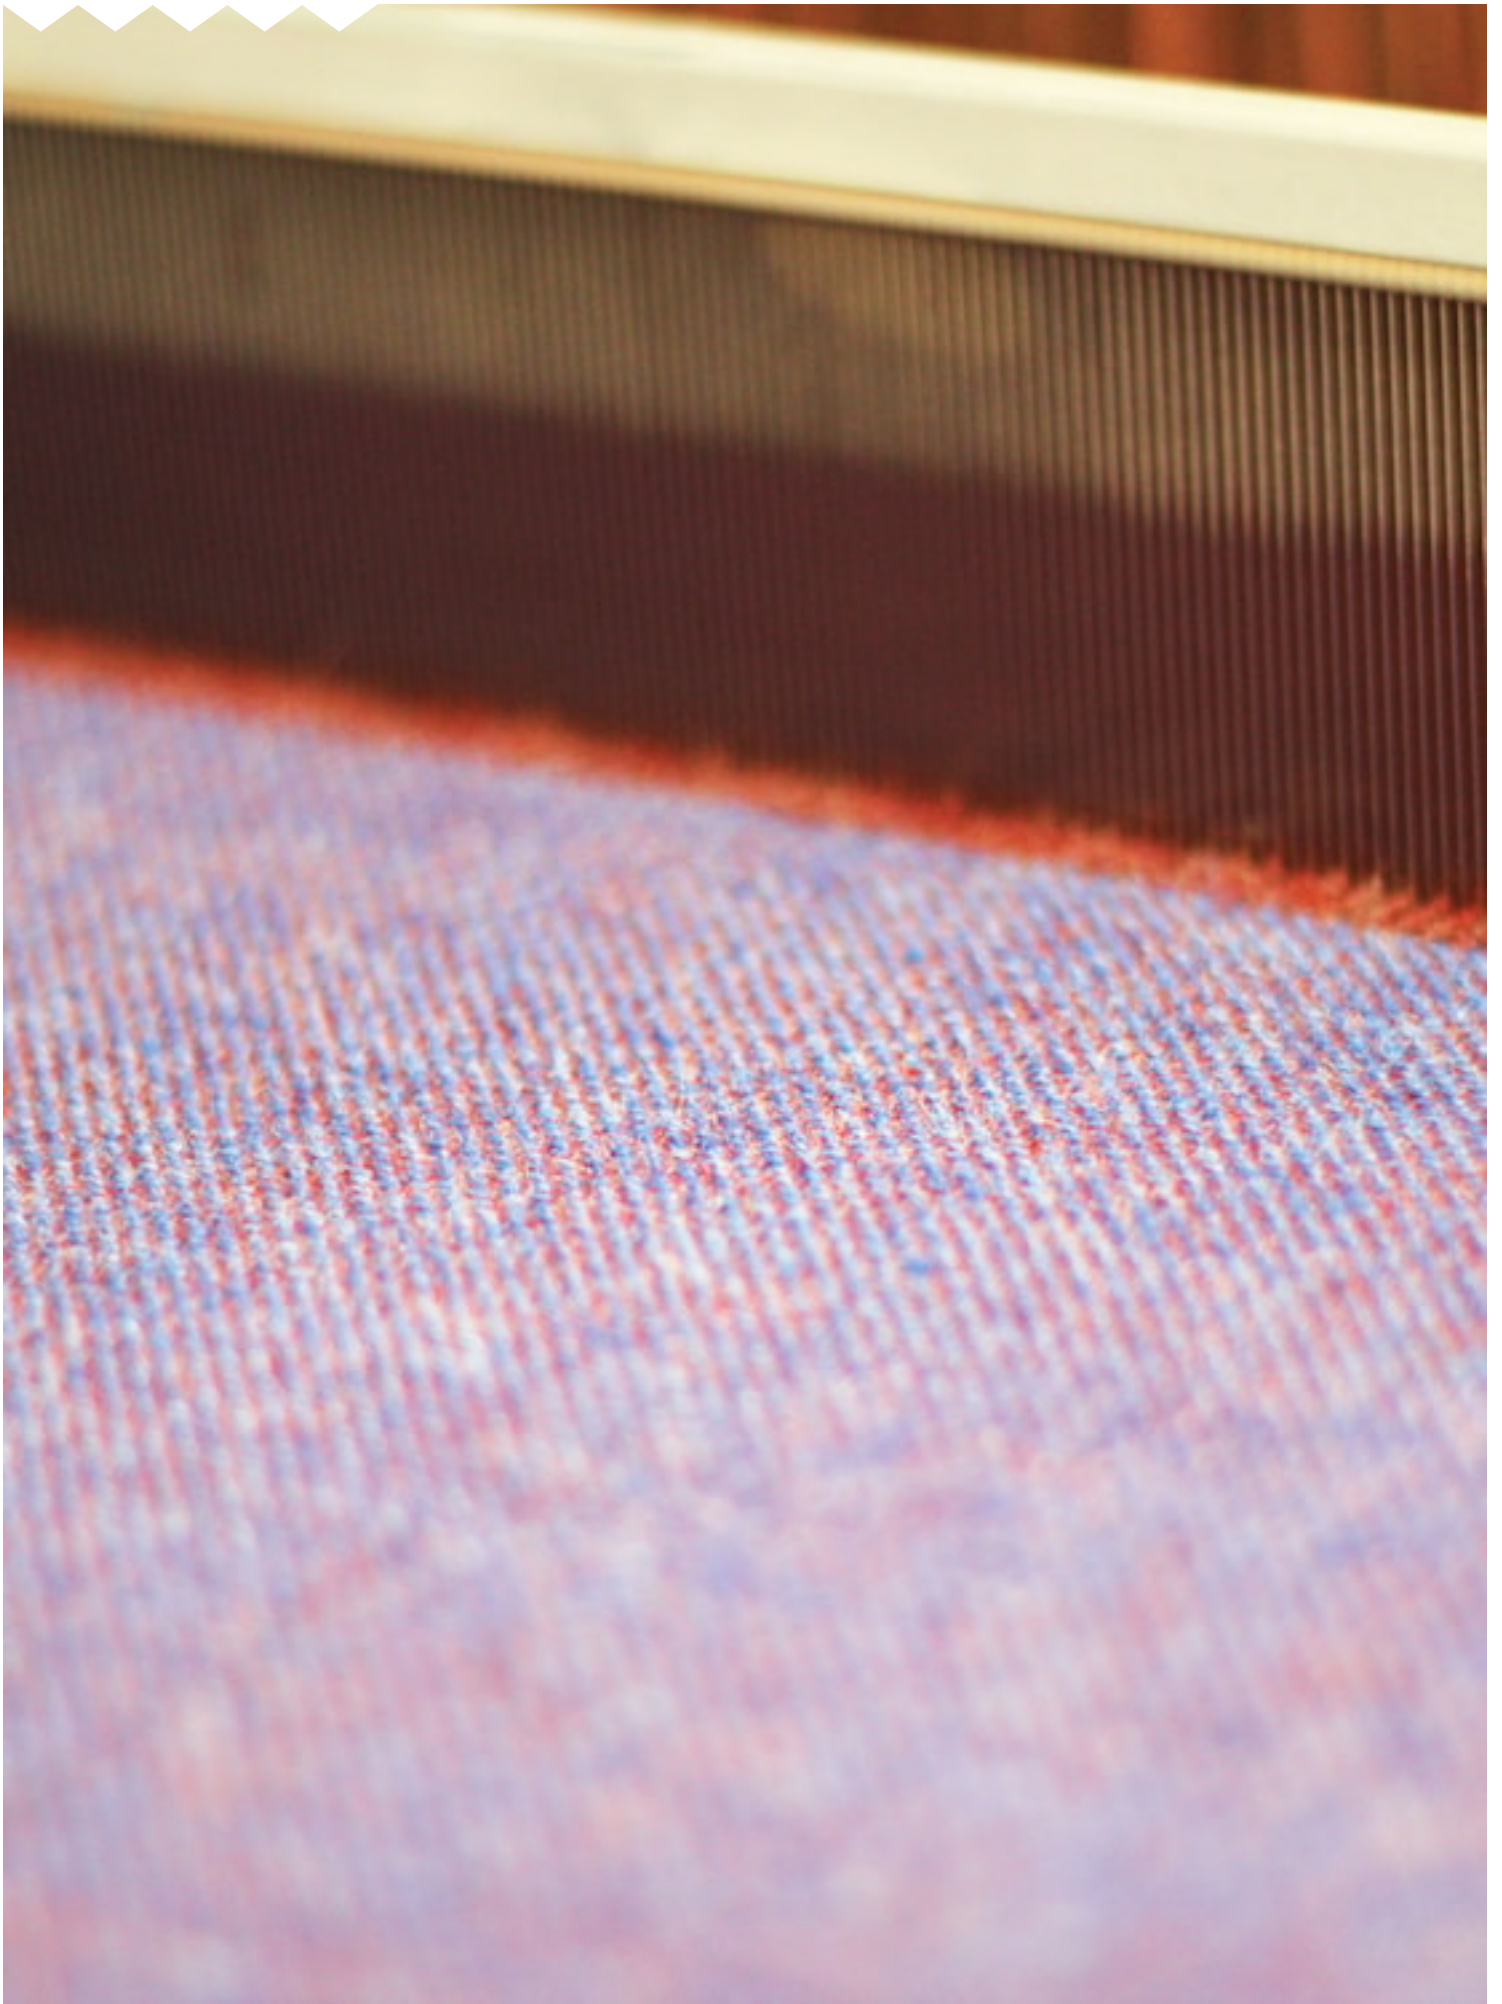


STEP

Upholstery fabrics



150




186




222




240



260




290




550




559



570




609



650




670




690




708




711




750




760



789



811



850

STEP

Upholstery fabrics


Width: 140 cm**Weight:** 410 g/m²**Material:** Wool 75%
Viscose 25%**Color fastness:***Against dry rubbing according to**EN ISO 105-X12:**- 4-5 (Scale 1-5)**Against light according to EN ISO*
*105-B02**- 5-7 (Scale 1-8)**Against wet rubbing according to**EN ISO 105-X12:**- 3-4 (Scale 1-5)***Abrasion resistance:***Martindale (According to EN ISO*
*12947-2):**- 50000 rubs***Flame retardancy:***- BS 5852, Crib 5**- TB 117**- IMO FTP Code Part 8 (IMO Res.**A.652 (16)**- UNI 9175, 1 IM***Care instructions:****For further information:**Svensson
511 82 Kinna, Sweden

T: +46 320 20 92 00

F: +46 320 21 10 10

E: info@ludvigsvensson.com







860




870



886

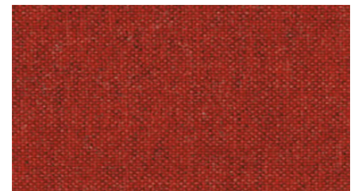

888



900



990

STEP

Upholstery fabrics

Width: 140 cm
Weight: 410 g/m²
Material: Wool 75%
 Viscose 25%

Color fastness:
Against dry rubbing according to EN ISO 105-X12:
 - 4-5 (Scale 1-5)
Against light according to EN ISO 105-B02
 - 5-7 (Scale 1-8)
Against wet rubbing according to EN ISO 105-X12:
 - 3-4 (Scale 1-5)

Abrasion resistance:
Martindale (According to EN ISO 12947-2):
 - 50000 rubs

Flame retardancy:
 - BS 5852, Crib 5
 - TB 117
 - IMO FTP Code Part 8 (IMO Res. A.652 (16)
 - UNI 9175, 1 IM

Care instructions:



For further information:

Svensson
 511 82 Kinna, Sweden

T: +46 320 20 92 00
 F: +46 320 21 10 10
 E: info@ludvigsvensson.com

