

Specifications

Description ClimaFlow Fan-AC

Line voltage 1~MOT 230V ±10% 50Hz P1 260W 1,2A

1~MOT 230V ±10% 60Hz P1 300W 1,3A

Rated values IP54 THCL 155

Power connection out Incl. power cable 2 Meter

Terminal box K05 fixed on motor

Control On/Off (RPM controllable by power or external controller)

Motor protection Thermal contact

Min. operating temperature °C -35

Quality of bearing Ball bearing with long-time lubrication

Color of rotor Black Material rotor Steel

Quality of blade Vanes equipped with whisper-quiet technology

Color of blade Blue
Material blade Aluminum

Material of construction Stainless steel / Aluminum

Material of mounting strip Galvanized steel


Material of bracket Galvanized steel - white powder coated


Protection Incl. basket

Suspension system Mounting strip and truss bracket

Control area Each vertical fan has a control area of approx. 256 m²/2700 ft²

Weight 6,2 KG / 13.6 lb




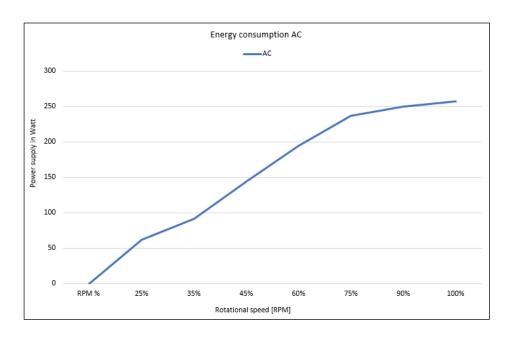







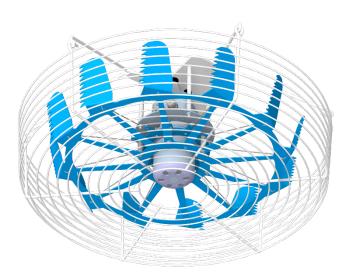

RIGHTS Copyright © Ludvig Svensson, Bleiswijk 2023. All rights reserved.

These terms of delivery can be viewed on our website <u>www.ludvigsvensson.com</u> and we will send you a free copy on request. In addition, supplementary contractual and/or general terms by your Svensson partner or installer may apply. In case of contradictions, the terms of the dealer/installer shall prevail.